

BEST PACKAGING




**Certified Refurbished Texwrap
2202 Continuous Motion Side
Seal Wrapper**

**Best Packaging Inc
(888) 930-BEST
BestPackaging.com**

Certified Refurbished Texwrap 2202 Continuous Motion Side Seal Wrapper

Shrink Tunnel Features



- Pin perforator air evacuation system
- Longitudinal seal on the side of package with thermostatically controlled seal system
- Touchscreen controlled heaters with auto tune
- Durable powder coated finish
- Diagnostic features on the touchscreen
- Self contained film scrap wind-up system with automatic speed compensatig dancer bar control
- Autospacing for control of randomly spaced, choke fed, or multipack products
- Enhanced sealing performance for tall packages
- Hot knife cross seal
- 10.5" cross seal height opening
- Setup scaled on all mechanical adjustments
- MOTION TRIM™ for increased speeds
- Handwheel adjustments for the seal jaw opening and seal line height
- Film centerfolder with lay-on cradle and capacity to handle up to 54" wide rolls of single wound film
- Infeed conveyor speed trim to control product spacing
- Test mode to simulate product run for estimating purposes
- Allen Bradley PLC control
- Swivel touchscreen operator interface with step by step product ste-up and help screens to explain each function
- Alpha-numeric "save as" for programs, ability to save custom product codes
- Horizontal and vertical photo eye controlled cross seal system to provide automatic adjustment of bag length
- Variable speed control with maximum belt speed of 100 fpm
- Dual speed modulation control automatically adjusts machine speed to match production flow (optional photo eye required)
- Automatic speed maximizer (automatically brings machine up to top speed for a given set up)

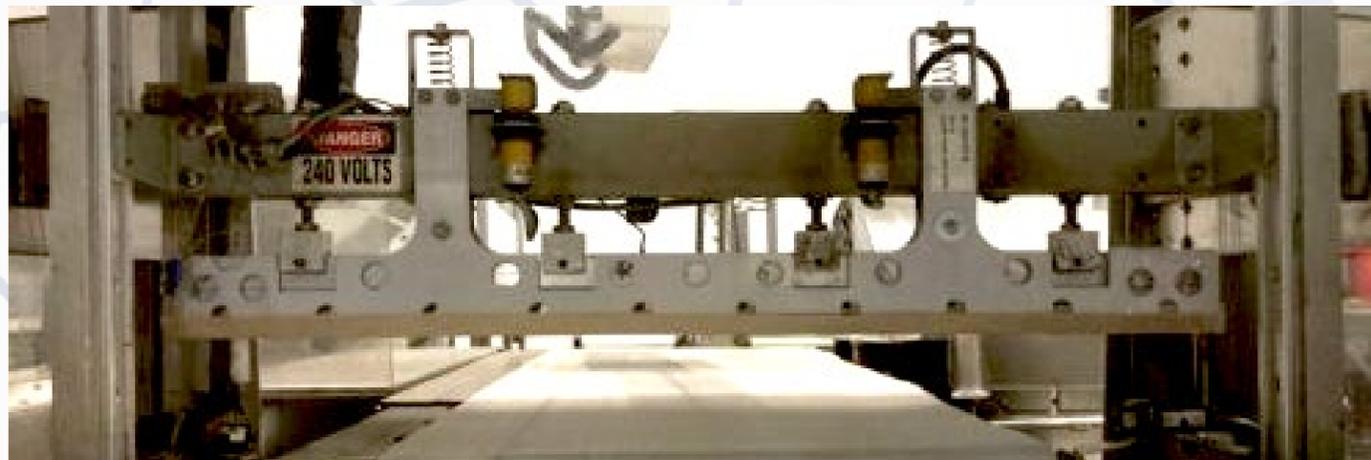


Certified Refurbished Texwrap 2202 Continuous Motion Side Seal Wrapper

Specifications

	Length	Width	Height
Overall Machine Dimmensions	156.5" (3975 mm)	78.25" (1986 mm)	66.25" (1683 mm)
Minimum Package Size	4" (102 mm)	2" (51 mm)	
Maximum Package Size	∞	20" (508 mm)	10.5" (266 mm)
Conveyor Height	32.5" - 37.5" (826 - 953 mm)		
Maximum Film Width	54" (1372 mm) flat film or 30" (762 mm) centerfold		
Maximum Film Speed	100 FPM (.51 Meters per Second)		
Electrical Requirements	220 VOLTS, 1 PHASE, 15 AMPS		
Approximate Shipping Weight	2,800 lbs		

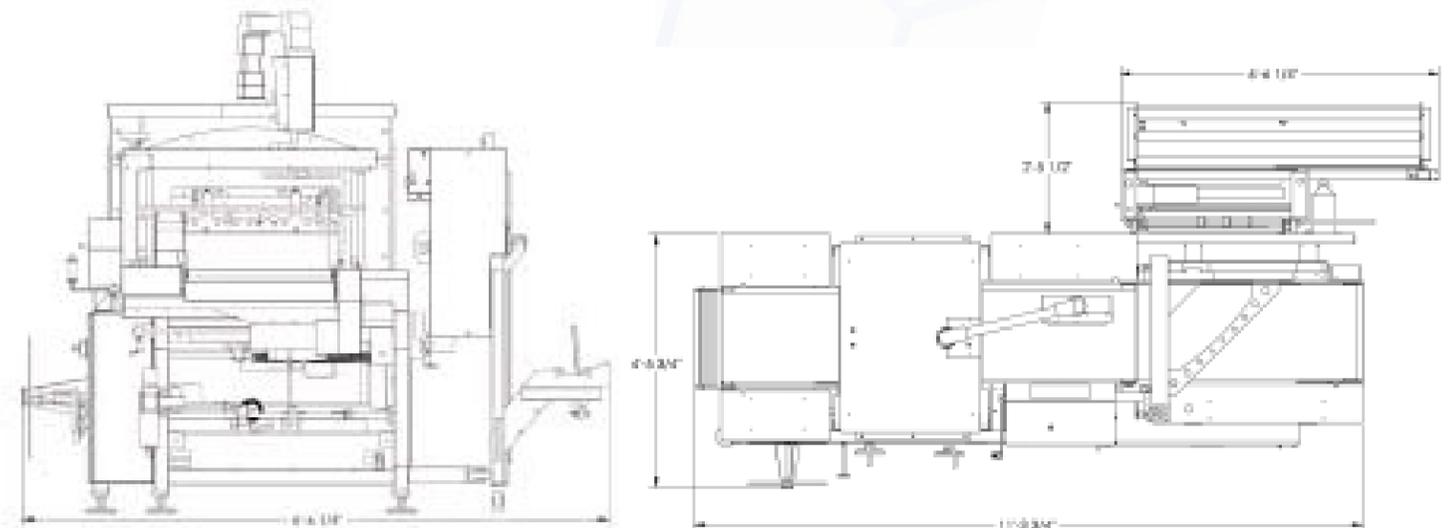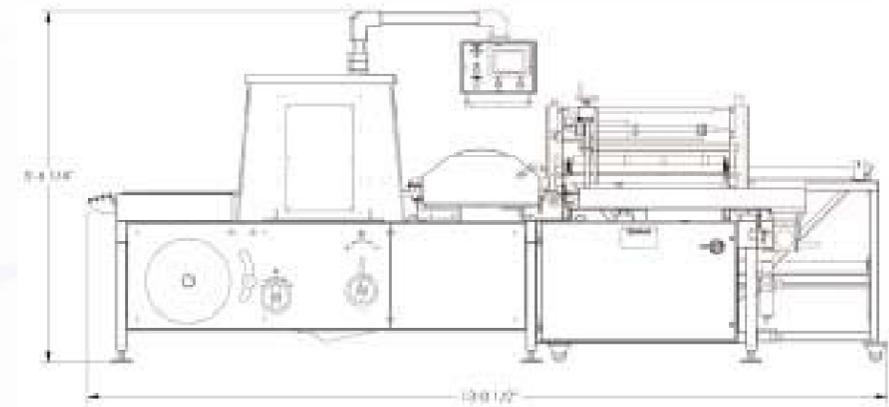

The detail of the product(s), descriptions or specifications (for example weight, color, size, etc.) are only approximate values based upon a "standard model" of the representative product(s)/feature(s). There may be slight variations in the actual product design, dimensions, and functionality as compared to the information shown on our website and/or any supplementary product documentation, including but not limited to product brochures and spec sheets.



BEST PACKAGING®

WHY WE'RE THE BEST

Since 1997, we have been consulting, designing and implementing packaging solutions to offer the best for your operations. We represent a variety of equipment manufacturers, so as to ensure we're matching the right solution for your packaging needs. We only align ourselves with quality brands to make sure we are delivering the best value. It is our goal to provide the highest quality service to make your job easier and more productive.

Over 150 years of industrial experience, collectively.

We represent multiple brands and our analysis is unbiased. We can match the best systems with your needs based on the versatility of the job.

With preventative maintenance, operator training, and 24/7 support, we're with you every step of the way!

Steve Kudia, Owner of Best Packaging, serves on the ASTM committee. As part of a prestigious worldwide network of technical experts, he aims to make sure processes stay efficient by monitoring trends and educating customers on how they can improve their performance.

Equipment We Sell & Service

Stretch Wrappers

Shrink Wrappers

Tray and Case Loaders

Tray & Case Erectors

Corrugated Case Formers

Conveyors

Palletizers

Robotics

Strappers & Banders

Much, much more!



@BestPackagingInc



@Best_Packaging



/Best-Packaging-Inc