

BEST PACKAGING



**Certified Refurbished Arpac®
Hanagata L18**



**Best Packaging Inc
(888) 930-BEST
BestPackaging.com**

Certified Refurbished Arpac® Hanagata L18 L-Bar Sealer

The Hanagata L18 from Arpac is an intermittent motion automatic L-Bar sealer featuring a proprietary design for reliable operation and ease of use. The L-Series from Arpac is engineered to provide you with high quality packaging for retail display. Achieve packaging speeds up to 40 ppm for most products.

Standard Features:


- Guillotine style seal head for simple film loading
- Independent scrap film rewind system with motor and closed loop operation
- Digital controls for conveyor speeds, timing, and temperature settings for fast accurate setup when changing product size and film
- Unique film trim takeaway
- Strong polycarbonate safety door for product visibility and safety
- Stroke limiting adjustable seal height
- Industry standard Allen Bradley electrical components
- Standard needle perfs allow positive air evacuation during shrink process for the most uniform retail page
- ARPAC's operator interface features a color touch screen with message display and self diagnostics
- NEMA 12 electrical cabinet and controls
- Hand crank adjustments to marked scale positions offer maximum flexibility with fast product changeover

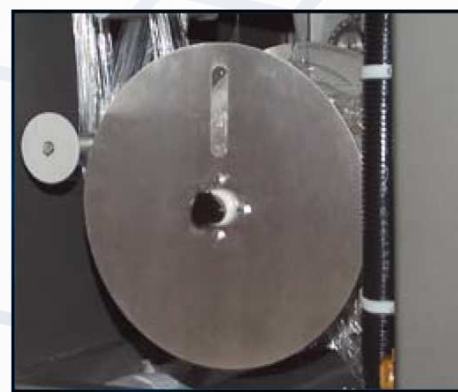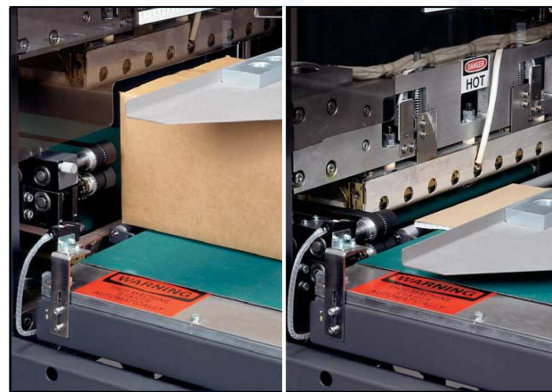


Certified Refurbished Arpac® Hanagata L18 L-Bar Sealer


Specifications			
	Length	Width	Height
Overall Machine Dimensions	65" (1651 mm)	36" (914 mm)	63" (1600 mm)
Machine Shipping Weight	1170 LBS (530.7 kg)		
Minimum Product Size	4" (102 mm)	1 ½" (38 mm)	¼" (6 mm)
Maximum Product Size*	18 ½" (470 mm)	15" (381 mm)	6" (152 mm)
Maximum Package Weight	25 lbs. (.45 kg)		
Packaging Speed	40 PPM based on 4" x 7" x 1" (102 x 178 x 25 mm) product		
Variable Conveyor Speed	45 - 90 FPM (.23 - .46 meters per second)		
Seal Dimensions	19 ½" x 17 ¾" (495 mm - 451 mm)		
Film Size	24" (610 mm) centerfold maximum, 11½" (292 mm) diameter, "B" wind		
Film Types	Polyolefin, PVC, or Polyethylene		
Power Requirements	230V (AC), 1Ph, 60Hz, 15A		
Pneumatic Requirements	80 psi, 1 SCFM		

* Package width + height cannot exceed 17 ¾ (451 mm). Package length + height cannot exceed 19 ½" (495 mm).

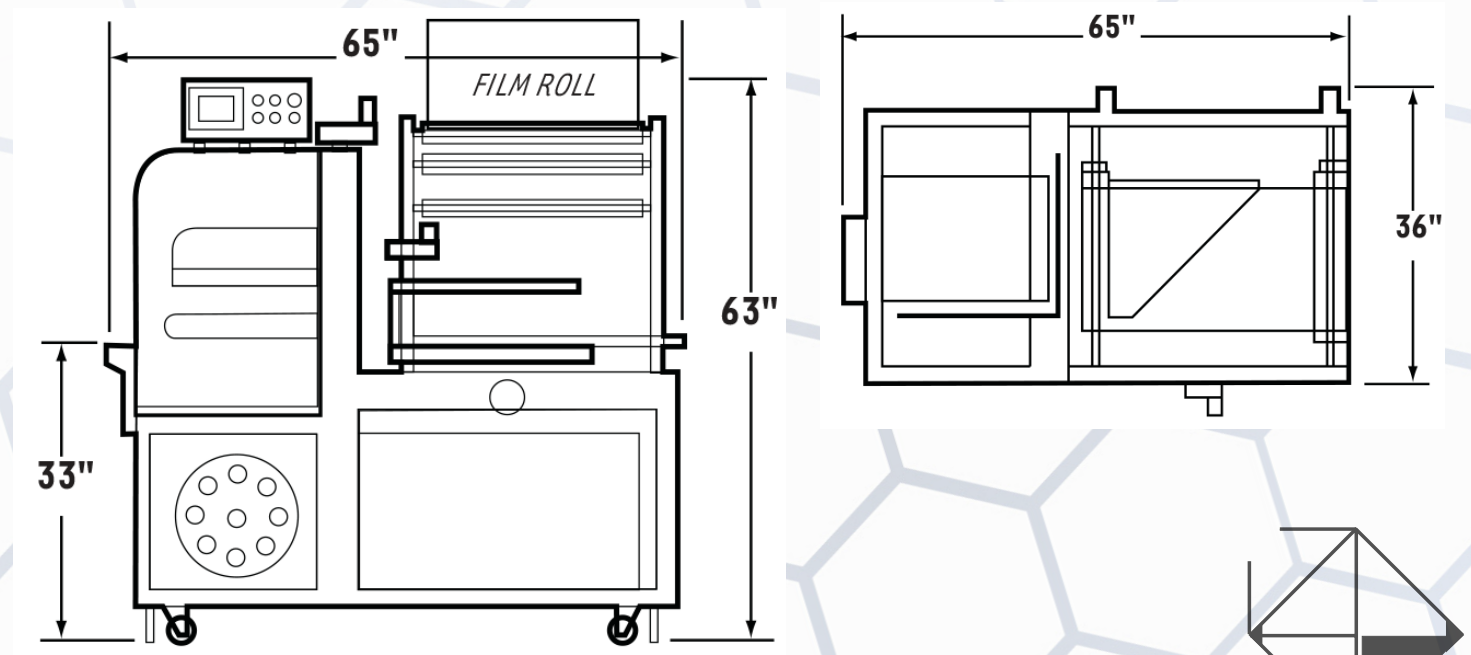

The detail of the product(s), descriptions or specifications (for example weight, color, size, etc.) are only approximate values based upon a "standard model" of the representative product(s)/feature(s). There may be slight variations in the actual product design, dimensions, and functionality as compared to the information shown on our website and/or any supplementary product documentation, including but not limited to product brochures and spec sheets.





BEST PACKAGING®

WHY WE'RE THE BEST

Since 1997, we have been consulting, designing and implementing packaging solutions to offer the best for your operations. We represent a variety of equipment manufacturers, so as to ensure we're matching the right solution for your packaging needs. We only align ourselves with quality brands to make sure we are delivering the best value. It is our goal to provide the highest quality service to make your job easier and more productive.

Over 150 years of industrial experience, collectively.

We represent multiple brands and our analysis is unbiased. We can match the best systems with your needs based on the versatility of the job.

With preventative maintenance, operator training, and 24/7 support, we're with you every step of the way!

Steve Kudia, Owner of Best Packaging, serves on the ASTM committee. As part of a prestigious worldwide network of technical experts, he aims to make sure processes stay efficient by monitoring trends and educating customers on how they can improve their performance.

Equipment We Sell & Service

Stretch Wrappers

Shrink Wrappers

Tray and Case Loaders

Tray & Case Erectors

Corrugated Case Formers


Conveyors


Palletizers


Robotics

Strappers & Banders

Much, much more!

 [@BestPackagingInc](#)

 [@Best_Packaging](#)

 [/Best-Packaging-Inc](#)