

# BEST PACKAGING



**Certified Refurbished  
Shanklin® A-27A L-Sealer**


**Best Packaging Inc  
(888) 930-BEST  
BestPackaging.com**

# Certified Refurbished Shanklin® A-27A Automatic L-Bar Sealer

The Shanklin A-27A automatic L-Sealer for shrink wrapping offers gentle product feed and straight line product flow that makes it ideal for handling a wide variety of products. The Shanklin A-27A features adjustable height seal jaws and can automatically wrap a wide range of products, including high profile or short length items, at speeds up to 35 packages per minute. Plus the L-seal design provides great flexibility and quick product change. This Shanklin L-bar sealer will accept randomly spaced product, fed either automatically or by hand.




➤ User Friendly Control Panel



➤ EZ Load Film Unwind



➤ Automatic Film Puller

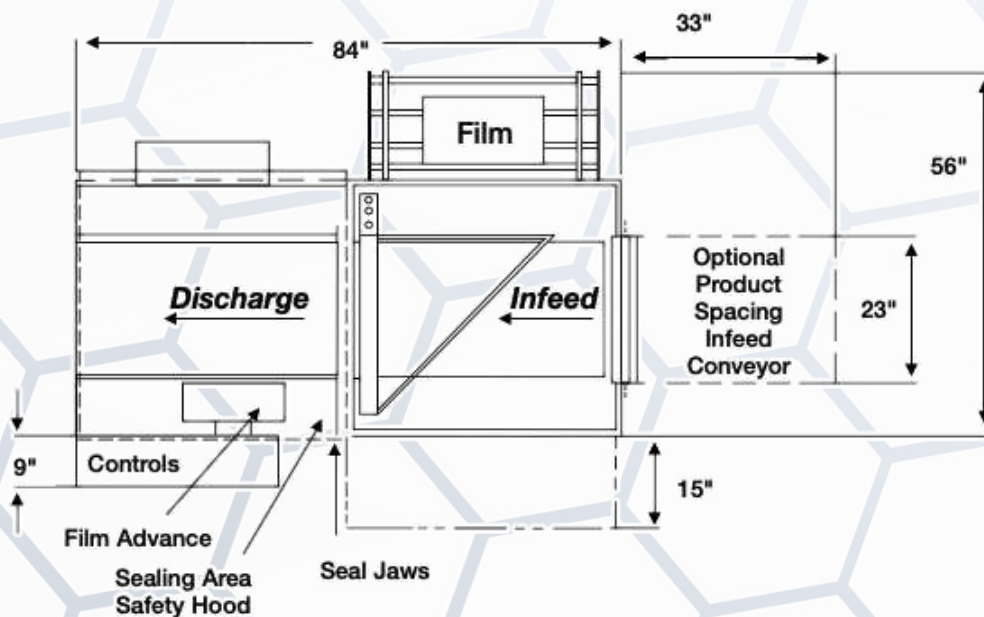



The detail of the product(s), descriptions or specifications (for example weight, color, size, etc.) are only approximate values based on actual product design, dimensions, and functionality as compared to the information shown on our website and/or any supplemental

# Certified Refurbished Shanklin® A-27A Automatic L-Bar Sealer

Specifications			
	Length	Width	Height
Overall Machine Dimensions	84" (2133 mm)	56" (1422 mm)	54" (1372 mm)
Seal Size	21" (533 mm)	33" (838 mm)	
Product Dimensions		4" - 31" (102 mm - 787 mm)	Up to 7½" (190 mm)
Max. Film Width	30" (762 mm) Folded, 42" (1067 mm) Flat (with compact centerfolder)		
Conveyor Height	31½" - 37½" (Adjustable) (800 mm - 953 mm)		
Packaging Speed	Up to 35 Packages Per Minute (Varies by product/application)		
Longitudinal and Transverse Seal	Hot Knife Jaws		
Electrical Requirements	230 V, 15 Amps, 60 Hz, 1 Phase		
Pneumatic Requirements	.05 CFM free air at 60 PSI (1.52 L/min at 413685 kPa)		
Safety Devices	<ul style="list-style-type: none"> <li>➤ Emergency stop button instantly stops all machine functions until manually reset.</li> <li>➤ A transparent hood, interlocked electrically with the automatic sequencing circuit, covers the sealing area; gas cylinders support the hood when it is lifted to allow access</li> <li>➤ Film clamp proximity sensors ensure safe sealing arm jaw closure</li> <li>➤ Multiple safety interlocks</li> <li>➤ Tamper-resistant controls</li> <li>➤ Low voltage sensors and actuators</li> </ul>		

upon a "standard model" of the representative product(s)/feature(s). There may be slight variations in the  
 any product documentation, including but not limited to product brochures and spec sheets.





# BEST PACKAGING®

## WHY WE'RE THE BEST

Since 1997, we have been consulting, designing and implementing packaging solutions to offer the best for your operations. We represent a variety of equipment manufacturers, so as to ensure we're matching the right solution for your packaging needs. We only align ourselves with quality brands to make sure we are delivering the best value. It is our goal to provide the highest quality service to make your job easier and more productive.

Over 150 years of industrial experience, collectively.

We represent multiple brands and our analysis is unbiased. We can match the best systems with your needs based on the versatility of the job.


With preventative maintenance, operator training, and 24/7 support, we're with you every step of the way!


Steve Kudia, Owner of Best Packaging, serves on the ASTM committee. As part of a prestigious worldwide network of technical experts, he aims to make sure processes stay efficient by monitoring trends and educating customers on how they can improve their performance.

### Equipment We Sell & Service

- Stretch Wrappers
- Shrink Wrappers
- Tray and Case Loaders
- Tray & Case Erectors
- Corrugated Case Formers
- Conveyors
- Palletizers
- Robotics
- Strappers & Banders
- Much, much more!

 @BestPackagingInc

 @Best\_Packaging

 /Best-Packaging-Inc