




BEST PACKAGING®

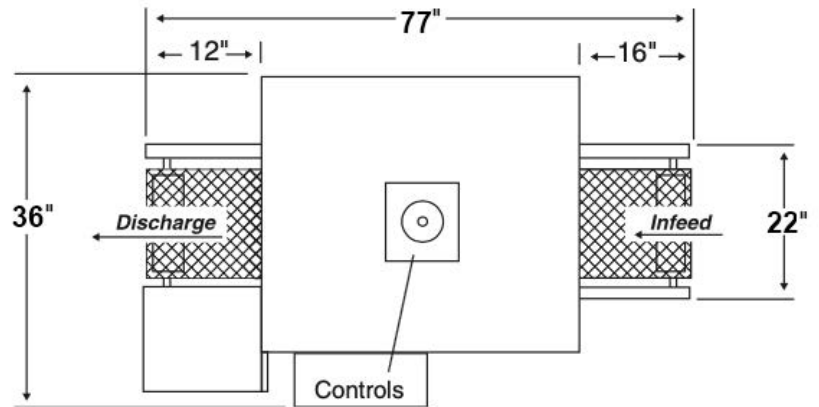

SHANKLIN T-7XL SHRINK TUNNEL

Tunnel passage	6" high x 22" wide x 42" long
Overall dimensions	61" high x 36" wide x 77" long*
Conveyor height	28" minimum, 40" maximum
Conveyor speeds	Variable from 15 to 66 ft./min.
Blower motor	3/4 hp, single phase capacitor start
Heaters	Three finstrip (encased element)
Power	230 volts, 38 amps, 1 phase, 8.7 KVA max. (4.4 KVA normal usage)
Temperature controller	Precision indicating controller Calibrated 50° to 500° F
Controls	<ul style="list-style-type: none"> • Conveyor variable speed control • On/off circuit breaker • Auxiliary heater switch • Variable air velocity control • Conveyor on/off switch
Accessories	<ul style="list-style-type: none"> • Teflon belts • End viewing window • Package guides • Casters